myPDFmanuals

You can read the recommendations in the user guide, the technical guide or the installation guide for HITACHI P50H401A. You'll find the answers to all your questions on the HITACHI P50H401A in the user manual (information, specifications, safety advice, size, accessories, etc.). Detailed instructions for use are in the User's Guide.

User manual HITACHI P50H401A
User guide HITACHI P50H401A
Operating instructions HITACHI P50H401A
Instructions for use HITACHI P50H401A
Instruction manual HITACHI P50H401A

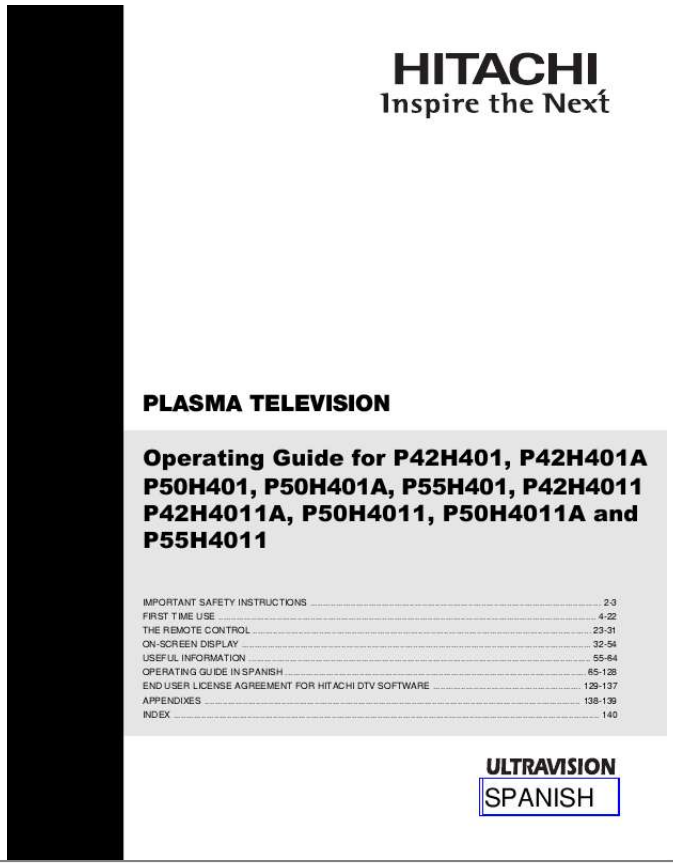

HITACHI
Inspire the Next

PLASMA TELEVISION

Operating Guide for P42H401, P42H401A P50H401, P50H401A, P55H401, P42H4011 P42H4011A, P50H4011, P50H4011A and P55H4011

IMPORTANT SAFETY INSTRUCTIONS 2-3
FIRST TIME USE 4-22
THE REMOTE CONTROL 23-31
ON-SCREEN DISPLAY 32-54
USEFUL INFORMATION 55-64
OPERATING GUIDE IN SPANISH 65-128
END USER LICENSE AGREEMENT FOR HITACHI DTV SOFTWARE 129-137
APPENDIXES 138-139
INDEX 140

ULTRAVISION
SPANISH

Your user manual
HITACHI P50H401A

Manual abstract:

1. Read these instructions. 2. Keep these instructions. 3. Heed all warnings. 4. Follow all instructions. 5. Do not use this apparatus near water. 6. Clean only with a dry cloth. 7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions. 8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat. 9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding 2 Note to the CATV system installer: This reminder is provided to call the CATV system installer's attention to Article 820-44 of the NEC that provides guidelines for proper grounding and, in particular, specifies that the cable ground shall be connected to the grounding system of the building, as close to the point of cable entry as practical. Important Safety Instructions Power source This plasma television is designed to operate on 120 volts 60 Hz, AC current. Insert the power cord into a 120 volt 60 Hz outlet. The mains plug is used as the disconnect device and shall remain readily operable. To prevent electric shock, do not use the plasma television's (polarized) plug with an extension cord, receptacle, or other outlet unless the blades and ground terminal can be fully inserted to prevent blade exposure. Never connect the plasma television to 50 Hz, direct current, or anything other than the specified voltage. Caution Never remove the back cover of the plasma television as this can expose you to very high voltages and other hazards. If the television does not operate properly, unplug the plasma television and call your authorized dealer or service center. Caution Adjust only those controls that are covered in the instructions, as improper changes or modifications not expressly approved by HITACHI could void the user's warranty. Warning · To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture.

· The plasma television should not be exposed to dripping or splashing and objects filled with liquids, such as vases, should not be placed on the television. · This apparatus shall be connected to a mains socket outlet with a protective earthing connection. Note This digital television is capable of receiving analog basic, digital basic cable television programming by direct connection to a cable system providing such programming. Certain advanced and interactive digital cable services such as video-on-demand, a cable operator's enhanced program guide and data-enhanced television services may require the use of a set-top box. For more information call your local cable company. Public viewing of copyrighted material Public viewing of programs broadcast by TV stations and cable companies, as well as programs from other sources, may require prior authorization from the broadcaster or owner of the video program material. This product incorporates copyright protection technology that is protected by U.S. patents and other intellectual property rights. Use of this copyright protection technology must be authorized, and is intended for home and other limited consumer uses only unless otherwise authorized. Reverse engineering or disassembly is prohibited. Note · There are no user serviceable parts inside the plasma television. · Model and serial numbers are indicated on back side and right side of the plasma television. Prevention of screen damages Continuous on-screen displays such as video games, stock market quotations, computer generated graphics, and other fixed (non-moving) patterns can be permanently imprinted onto your TV screen. Such "SCREEN DAMAGES" constitute misuse and are NOT COVERED by your HITACHI Factory Warranty. If still images are left on the screen for more than 2.5 minutes, protection function will work automatically so that contrast reduces to minimize image retention on plasma display panel. Please note that this is not a malfunction but it helps to minimize image retention. The original contrast will restore after moving images are displayed for about 6 minutes. Original contrast can be restored quickly by turning power Off/On with remote control or power switch on unit. Lead Notice This product contains lead..

Your user manual
HITACHI P50H401A